


# Unlocking the display mechanism without a remote control.

## Unlocking the mechanism

1. Remove the plug from the outlet.
2. Lay the display down horizontally
3. Undo the screws on the bottom plate.
4. Place the wrench on the square metal bar on which the motor is mounted on. [ See photo ]
5. Turn the bar  $\frac{1}{3}$ rd of a rotation against the clock with wrench number 8.  
You will feel some resistance because the bar is connected to the motor.
6. The display hooks are opened. You can now remove the glasses.

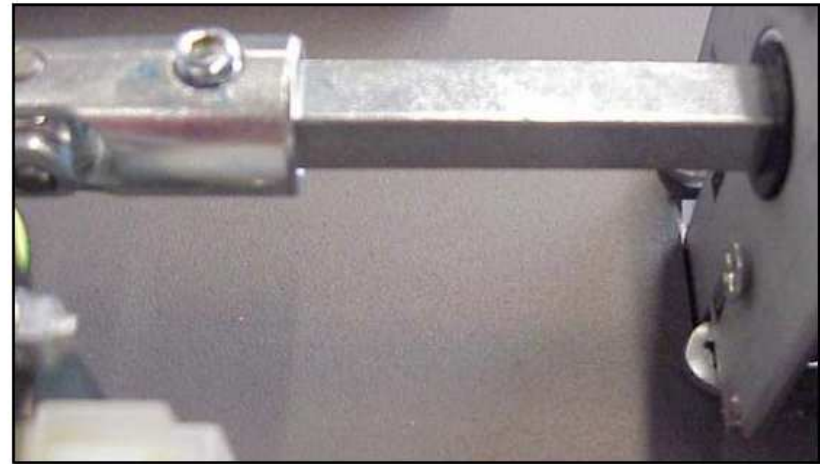

Required; wrench #8

