


Requirements

- ✦ The wall must be empty and strong enough to hold approximately 80KG per horizontal meter.
- ✦ A drywall or plasterboard wall might not be suitable and therefore needs to be reinforced by the installer by using a wooden panel.
- ✦ We advise to use the fitting & connection materials as delivered with your order, to assure a solid and safe assembly.

In case of doubt, please present our fitting materials to your local shop fitter or assembly partner so they can advise if your wall is suitable for fitting

Power outlet positioning

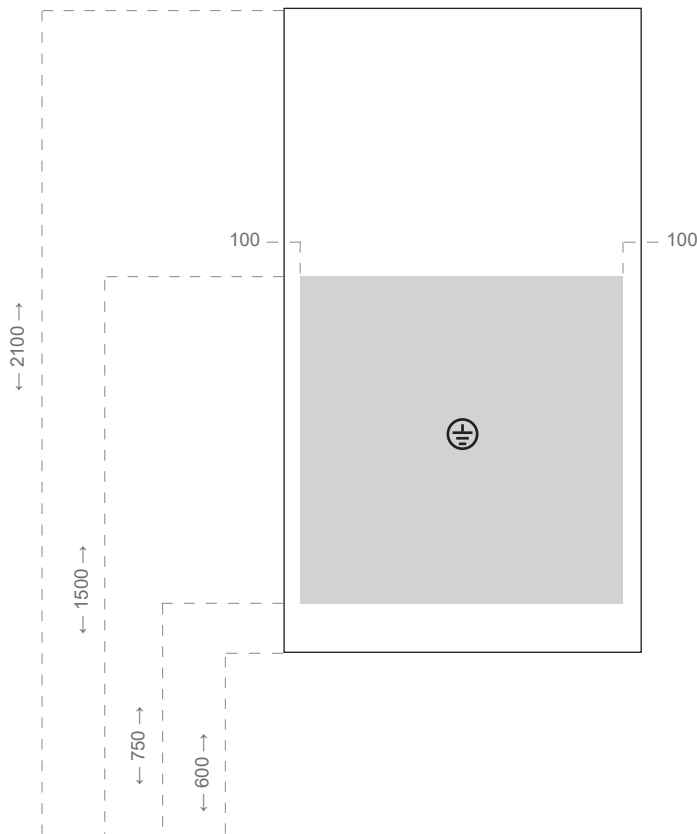

- ⊕ The power outlet must be positioned between 750 and 1500mm from the floor and 100mm from the side of the panel.